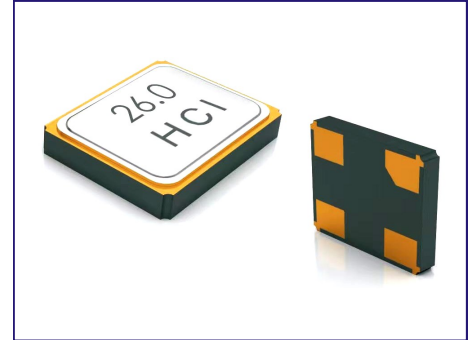


QUARTZ CRYSTAL UNIT IN SMD 2.5x2.0MM CERAMIC SEAM SEAL PACKAGE.
PRODUCT FEATURES


- Small dimensions 2.5x2.0x0.55 with 4 solder pads.
- Highly reliable vacuum seam sealed ceramic package.
- Tight tolerances and stabilities over temperature range.
- Automotive compliance to AEC-Q200 available.
- RoHS compliant, LEAD-FREE and HALOGEN-FREE.

PRODUCT PHOTO (NOT IN SCALE)

APPLICATIONS

- Wireless LAN
- Bluetooth
- Mobil communication
- Handheld equipment

PRODUCT SPECIFICATIONS

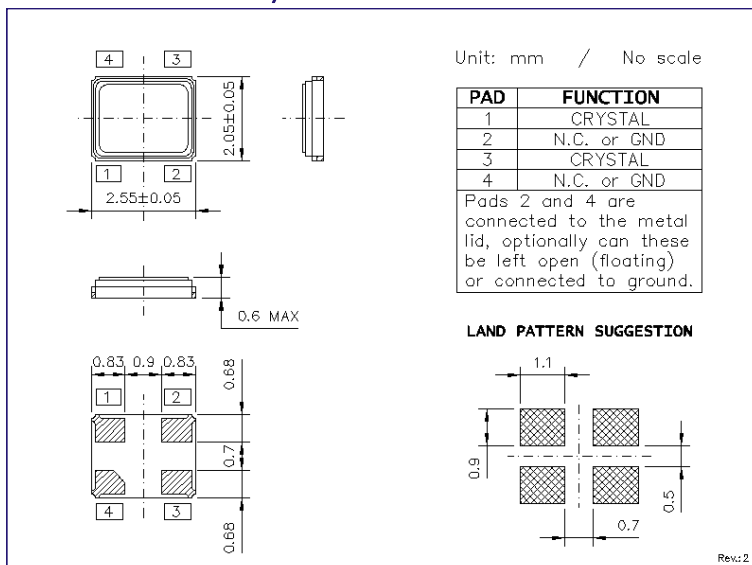PARAMETER	XC22M4		CONDITIONS / REMARKS
Nominal frequency range	12.000 ~ 60.000MHz		--
Crystal cut and mode	AT-cut / Fundamental		--
Frequency tolerance	±10ppm / ±20ppm / ±30ppm		other options available.
Frequency stability	±10ppm	±15ppm	Other options available.
Operating temperature range	-20 to +70°C	-30 to +85°C	other options available.
Equivalent series resistance	<125Ω		12.000 to 15.999MHz
	<100Ω		16.000 to 18.999MHz
	<80Ω		19.000 to 29.999MHz
	<60Ω		30.000 to 60.000MHz
Load capacitance	6 ~ 32pF or SERIES		Please specify.
Shunt capacitance	<3.0pF		--
Drive level	50μW TYP / 200μW MAX		--
Storage temperature range	-55 to +125°C		--

PACKAGE OUTLINE / DIMENSIONS

PACKAGING INFORMATION

- Tape & Reel compliant to EIA-481.
- Embossed carrier width 8mm.
- Component pitch in carrier 4mm.
- Reel diameter 180mm.
- QTY per reel: 3,000pcs MAX.

RECOMMENDED REFLOW PROFILE
